


PPC-GS1273T

Pictures



Dimensions:

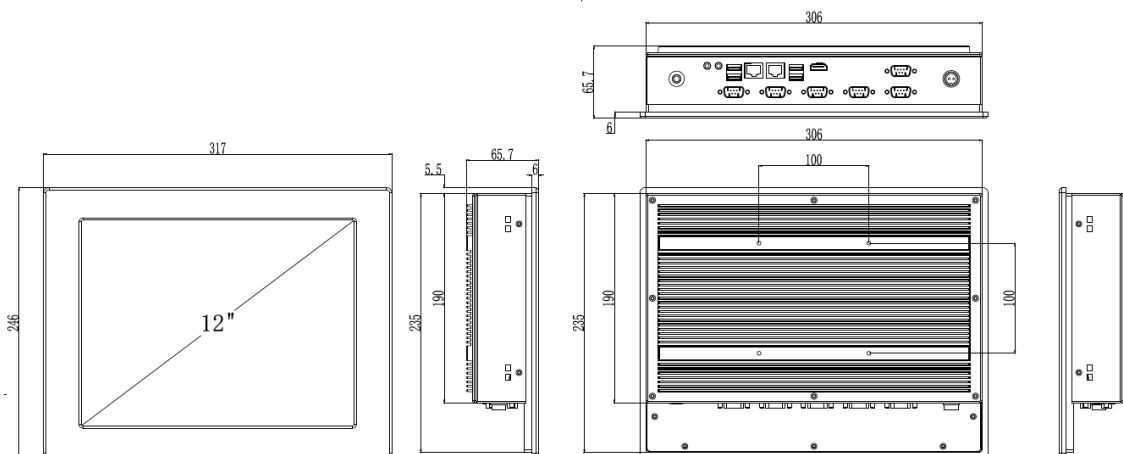

Features:

- Intel®Core 6th I3 high performance lower power consumption processor
- 12"Industrial LCD and 5 wires resistive touch screen
- 2GB DDR3 RAM, Max 8GB
- 4USB3.0+4COM,1*VGA+1*HDMI
- 2* Intel I211 RJ45
- 9-24V DC IN, 9-36V DC optional
- Fully-sealed,fanless and dustproof design
- 2*Intel i211 GbE RJ45
- 9~24V wide-range DC input
- One-year warranty
- Color: Silver/Black/White

Specifications:

Display Feature	LCD	12" LCD
	Resolution	1024*768
	Brightness	300 cd/m ²
	Contrast	400:1
	Screen	5-wires resistive touch screen
Performance	Chipset	Intel®Core 6 th I3
	Memory	2GB DDR3 RAM, Max 8 GB
	Hardware monitor	Voltage and CPU temperature monitor
	Watch dog	255 levels timer interval,setup by software
	Storage	SSD、HDD
Power	Power supply	9-24V DC IN, Or 9-36V DC IN optional
		16W (standby) 22W (rate power)
OS	OS	Windows 7/8/10、Linux
I/O	USB	4*USB3.0
	COM	4*RS232, 1*RS422/485 optional
	Lan	2* Intel I211 RJ45 GbE
	Audio	1*Line out + 1* MIC
	Display	1*VGA +1*HDMI
Environment	Anti-vibration	5-19Hz/1.0mm amplitude;19-200Hz/1.0g acceleration
	Anti-shock	acceleration10g/11ms duration
	IP level	Front IP 65 optional
	Reliability	MTBF≥50000h; MTTR≤0.5h
	Operating temperature:	-10℃～50℃ with air flow
	Storage temperature	-20℃～60℃
	Operating humidity:	95% @40℃, non-condensing
Mechanical	Dimension	288mm (L)*226mm(W)*60mm(H)
	Material	Aluminum alloyed fanless design
	Weight	3.5kg/5.0kg(N.T/G.W)
	Color	Silver/White/Black