


# PC-GS5086A

## Pictures



## Dimension

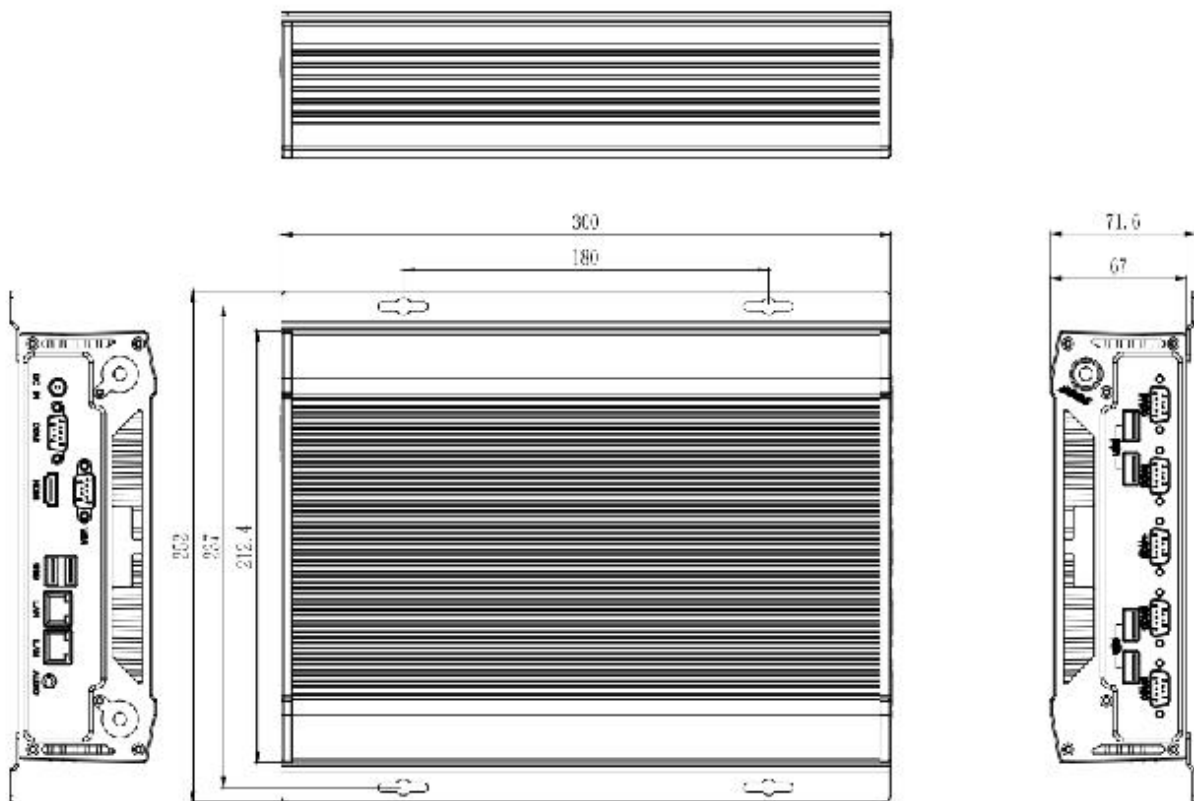

**Specification:**

<b>Performance</b>	Chipset	Intel®HM86 chipset, FCPGA 946
	RAM	2*SO-DIMM slot, Support MAX 16G
	Hardware Monitoring	Voltage & CPU Temperature Monitoring
	Watchdog	0-255 sec By Software
	Storage	N/A
	Power	9-36V DC
<b>I/O</b>	USB	4 *USB2.0 +2*USB3.0
	COM	6*RS2323(1-2* RS485 optional)
	Ethernet	2* intel I211 GbE
	Audio	1*Line out,1*Mic in
	Display	1*VGA, 1*HDMI
	Expansion	1*mini PCIe (3G 4G WIFI BT optional)
	GPIO	GPIO( 4in/4out) (occupy COM port)
<b>O/S</b>	O/S	Windows 7/8/10, Linux
<b>Environmental</b>	Anti-vibration	5-19Hz/1.0mm amplitude;19-200Hz/1.0g, acceleration
	Anti-shock	10g acceleration, 11ms duration
	Reliability	MTBF≥50000h; MTTR≤0.5h
	Operating Temp	SSD: -20℃ ~ 70℃ (with air flow) HDD: 0℃ ~ 50℃
	Storage Temp	-40℃ ~ 80℃
	Operating Humidity	95% @40℃, non-condensing
<b>Mechanical</b>	Dimensions	300mm *252mm *67mm
	Material	High-strength and elegant Al-alloy, Fanless Design
	Weight	4.3Kg/5.8Kg
	Color	Silver/Black